




# Product Installation Instructions

## Rope Caulk

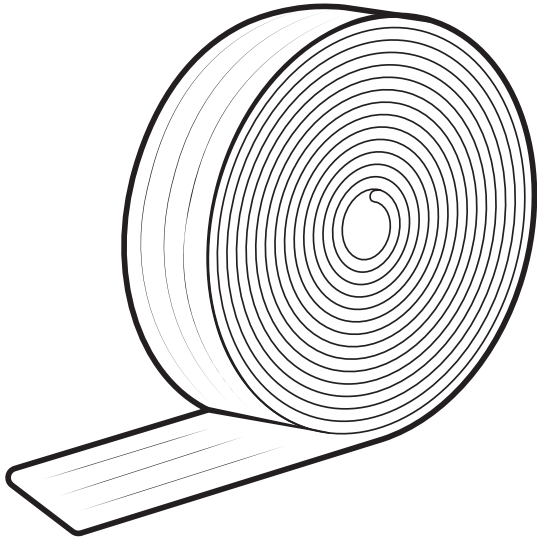

### To complete installation, you will need:

- Rope caulk
- A sharp scissors or utility knife
- No caulk gun or special tools are required.

### Instructions

#### FIND AIR LEAKS

1. Inspect around windows, doors, and other openings for visible gaps or places where you feel drafts.

#### TO INSTALL

1. Pull apart one strand of rope caulk from the package. For smaller cracks, divide the strand into thinner pieces if needed.
2. Tear or cut the rope caulk to the desired length. Press it firmly into the gap using your fingers. Continue pressing along the entire opening until the gap is completely sealed.
3. Run your finger along the rope caulk to create a continuous seal. If a draft remains, simply add another piece and press it into place.

### Helpful Tips:

- Seal only the gaps where outside air enters your home.
- Rope caulk remains soft and flexible and will not harden or crack over time.
- When no longer needed, peel the rope caulk away by hand and dispose of it according to local regulations.